

VERTICAL SECTION CAR

MAIN FEATURES


Nominal load: 630 kg  
 8 persons  
 Speed: 1 m/s  
 Travel: 3 m  
 N. of stops: 2  
 N° of Doors: 2

Power voltage: 400 V  
 N. of phases: 3  
 Frequency: 50 Hz  
 Lighting Power: 230 V  
 Power: 4.66 kW  
 6.3 HP  
 Nominal current: 10.5 A  
 Starting current: 21 A




Deadweight car+frame: 794 kg

Controller type: SIMPLEX

DETAIL Y  
Doors on Bottom Level



DETAIL Z  
Doors Top Level

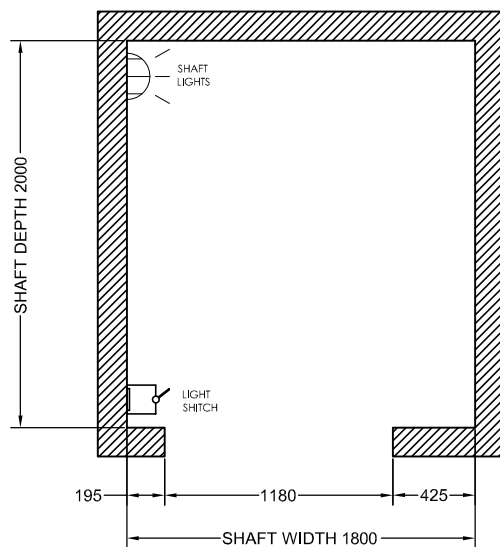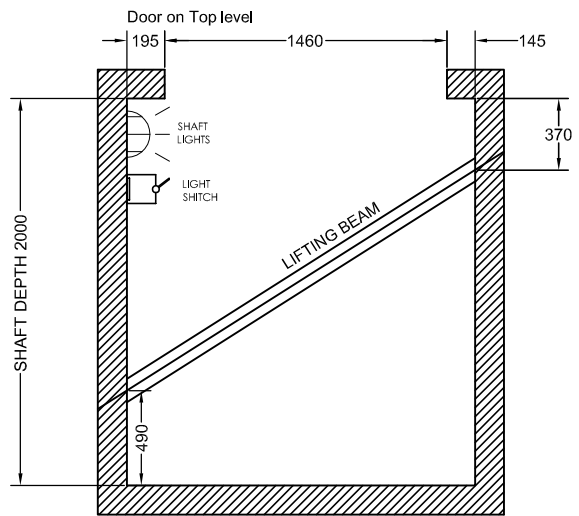

DOOR ON BOTTOM LEVEL

SCALE

DRAWN B. CAFFREY  
JULY 2008

UNIT

CHECKED

mm

DRAWING TYPE: BUILDERS DRAWING  
 LIFT DETAILS: 630kg 8 PERSON 2 STOP THRU CAR MRL TRACTION WITH 900mm SIDE OPENING DOORS  
 NOTE: INFORMATION ONLY DRAWING

