





**MAIN FEATURES**

Nominal load:	800	kg
	8	persons
Speed:	1	m/s
Travel:	3	m
N. of stops:	2	
N° of Doors:	2	
Power voltage:	400	V
N. of phases:	3	
Frequency:	50	Hz
Lighting Power:	230	V
	7.4	kW
Nominal current:	16.5	A
Starting current:	33	A
Deadweight car+frame:	918	kg
Controller type:	SIMPLEX	

**DETAIL Y**  
Doors on Bottom Level



**DETAIL Z**  
Doors Top Level

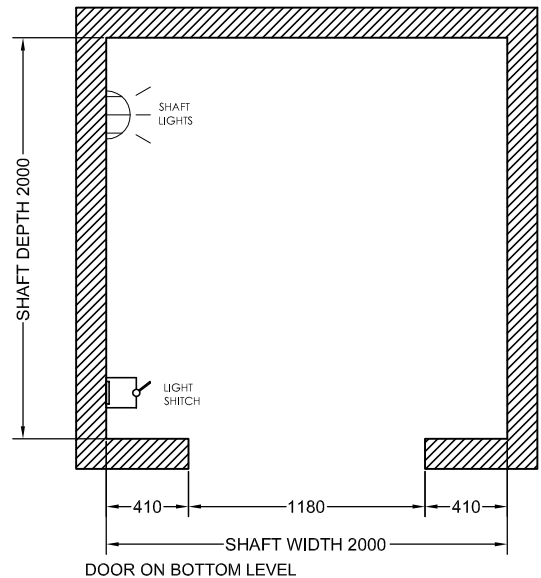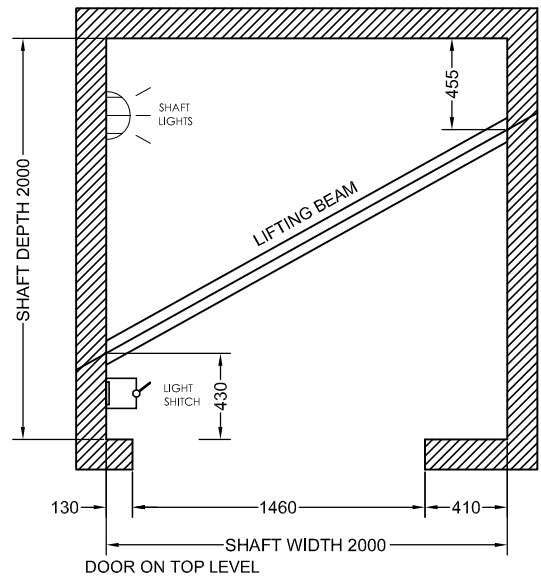

SCALE	UNIT	mm
DRAWN	CHECKED	
B. CAFFREY		
JULY 2008		

DRAWING TYPE: BUILDERS DRAWING  
LIFT DETAILS: 800kg 10 PERSON 2 STOP IN-LINE MRL TRACTION WITH 900mm CENTRE OPENING DOORS  
NOTE: INFORMATION ONLY DRAWING

